

STABILO® Professional

Mobile scaffold series 50

- + TÜV-approved, suitable for a load of 200 kg/m² (scaffold class 3) in accordance with DIN EN 1004
- + The ideal scaffold for large-scale work available with a working height up to 14.00 m
- + Equipped with sturdy steel stabilisers with castors for a maximum of stability
- + With height-adjustable castors (Ø 150 mm) for secure placement on uneven grounds
- + The platforms can be easily fitted between any of the diagonal braces and can be height-adjusted in 25 cm spacings without any changes to the scaffold itself
- + The 3.00 m² platform provides plenty of safe space for staff and material
- + The easy to handle vertical frames can easily be assembled by a single person and the profiled rungs ensure a safe ascendancy of the scaffold
- + Scaffolds with a working height of 6.40 m and higher are supplied with outriggers
- + Field length: 2.00 m or 2.50 m
- + Field width: 1.50 m



Depending on the configurations shown below additional ballast weights are required (sold separately as accessories). Please see the assembly instructions in the manual or on our website www.krause-systems.de for more information on the quantity of ballast weights needed. System components are shown on page 132 and following.



7350		Field length of scaffold 2.00 m – field width of scaffold 1.50 m												
	A up to approx.	in m	3.00	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
	B approx.	in m	1.00	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
	C approx.	in m	2.30	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40
Weight		in kg	72.0	133.0	145.0	193.0	239.0	255.0	266.0	282.0	328.0	344.0	356.0	371.0
Article No.			735201	735218	735225	735232	735249	735256	735263	735270	735287	735294	735300	735317

7450		Field length of scaffold 2.50 m – field width of scaffold 1.50 m												
	A up to approx.	in m	3.00	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
	B approx.	in m	1.00	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
	C approx.	in m	2.30	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40
Weight		in kg	79.0	147.0	159.0	209.0	263.0	281.0	293.0	311.0	365.0	383.0	395.0	413.0
Article No.			745200	745217	745224	745231	745248	745255	745262	745279	745286	745293	745309	745316

Mobile scaffold series 50



Working height: 3.00 m
Scaffold height: 2,30 m
Platform height: 1.00 m


Working height: 4.40 m
Scaffold height: 3,40 m
Platform height: 2.40 m

Working height: 5.40 m
Scaffold height: 4,40 m
Platform height: 3.40 m

Working height: 6.40 m
Scaffold height: 5,40 m
Platform height: 4.40 m

Working height: 7.40 m
Scaffold height: 6,40 m
Platform height: 5.40 m

Working height: 8.40 m
Scaffold height: 7,40 m
Platform height: 6.40 m

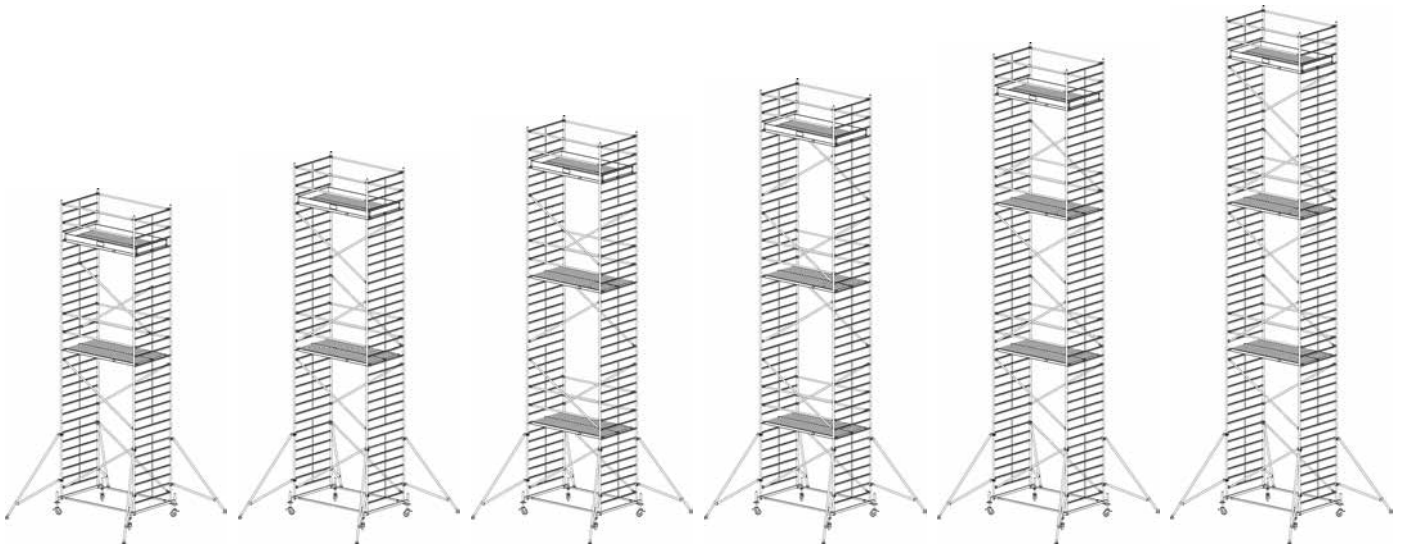

Working height: 9.40 m
Scaffold height: 8,40 m
Platform height: 7.40 m

Working height: 10.40 m
Scaffold height: 9,40 m
Platform height: 8.40 m

Working height: 11.40 m
Scaffold height: 10,40 m
Platform height: 9.40 m

Working height: 12.40 m
Scaffold height: 11,40 m
Platform height: 10.40 m

Working height: 13.40 m
Scaffold height: 12,40 m
Platform height: 11.40 m

Working height: 14.40 m
Scaffold height: 13,40 m
Platform height: 12.40 m

Working height m	Field length of scaffold	Field length of scaffold	3.00 m	4.40 m	5.40 m	6.40 m	7.40 m	8.40 m	9.40 m	10.40 m	11.40 m	12.40 m	13.40 m	14.40 m
Scaffold height m			1.00 m	2.40 m	3.40 m	4.40 m	5.40 m	6.40 m	7.40 m	8.40 m	9.40 m	10.40 m	11.40 m	12.40 m
Platform height m			2.30 m	3.40 m	4.40 m	5.40 m	6.40 m	7.40 m	8.40 m	9.40 m	10.40 m	11.40 m	12.40 m	13.40 m
Parts list	Article No.	Article No.	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity
Vertical frame 2 m	705181	705181	2	2	3	4	5	6	7	8	9	10	11	12
Vertical frame 1 m	705198	705198	0	2	2	2	2	2	2	2	2	2	2	2
Platform with hatch	701213	701220	1	1	1	1	2	2	2	2	3	3	3	3
Platform without hatch	701251	701268	1	1	1	1	2	2	2	2	3	3	3	3
Diagonal brace	702852	702845	1	2	2	4	4	6	6	8	8	10	10	12
Rail brace	702210	702203	1	4	4	4	8	8	8	8	12	12	12	12
Base brace	912848	912831	0	2	2	2	2	2	2	2	2	2	2	2
Stabiliser	704177	704177	0	2	2	2	2	2	2	2	2	2	2	2
Outrigger	914095	914095	0	0	0	4	4	4	4	4	4	4	4	4
Longitudinal board	703750	703750	0	2	2	2	2	2	2	2	2	2	2	2
Transversal board	703712	703729	0	2	2	2	2	2	2	2	2	2	2	2
Foot plate	914026	914026	4	4	4	4	4	4	4	4	4	4	4	4
Set of castors Ø 150 mm, height-adjustable	914309	914309	1	1	1	1	1	1	1	1	1	1	1	1
Gravity pin	704405	704405	4	12	14	16	18	20	22	24	26	28	30	32

Accessories

Article No.	Parts list	Weight (kg)
910059	Set of stabilisers, 1.2 m	6.9
910066	Set of stabilisers, 1.5 m	8.4
704306	Ballast weight	10.0
914309	Set of castors Ø 150 mm, height-adjustable	14.0
714138	Castor Ø 150 mm, rubber-coated	3.5