

Mobile scaffold series 5000


- + TÜV-approved, suitable for a load of 200 kg/m² (scaffold class 3) in accordance with DIN EN 1004
- + The ideal scaffold for working heights up to 14.00 m
- + The platforms can be easily fitted between any of the diagonal braces and can be height-adjusted in 25 cm spacings without any changes to the scaffold itself
- + The 4.00 m² platform provides plenty of safe space for staff and material
- + The easy to handle vertical frames can easily be assembled by a single person and the profiled rungs ensure a safe ascendency of the scaffold
- + All working heights of this scaffold are supplied with outriggers
- + Field length: 2.00 m, 2.50 m or 3.00 m
- + Field width: 1.50 m



i Depending on the configurations shown below additional ballast weights are required (sold separately as accessories). Please see the assembly instructions in the manual or on our website www.krause-systems.de for more information on the quantity of ballast weights needed. System components are shown on page 132 and following.

735000		Field length of scaffold 2.00 m – field width of scaffold 1.50 m											
	A up to approx.	in m	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30		
	B approx.	in m	2.30	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30		
	C approx.	in m	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30		
Weight	in kg		153.0	165.0	180.0	226.0	246.0	258.0	274.0	319.0	335.0		
Article No.			739049	739056	739063	739070	739087	739094	739100	739117	739124		
745000		Field length of scaffold 2.50 m – field width of scaffold 1.50 m											
	A up to approx.	in m	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30	13.30	14.30
	B approx.	in m	2.30	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30
	C approx.	in m	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30	13.30
Weight	in kg		166.0	178.0	196.0	250.0	268.0	284.0	302.0	356.0	374.0	386.0	404.0
Article No.			749048	749055	749062	749079	749086	749093	749109	749116	749123	749130	749147
755000		Field length of scaffold 3.00 m – field width of scaffold 1.50 m											
	A up to approx.	in m	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30	13.30	14.30
	B approx.	in m	2.30	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30
	C approx.	in m	3.30	4.30	5.30	6.30	7.30	8.30	9.30	10.30	11.30	12.30	13.30
Weight	in kg		186.0	198.0	217.0	288.0	310.0	322.0	341.0	412.0	431.0	443.0	462.0
Article No.			759047	759054	759061	759078	759085	759092	759108	759115	759122	759139	759146

Mobile scaffold series 5000

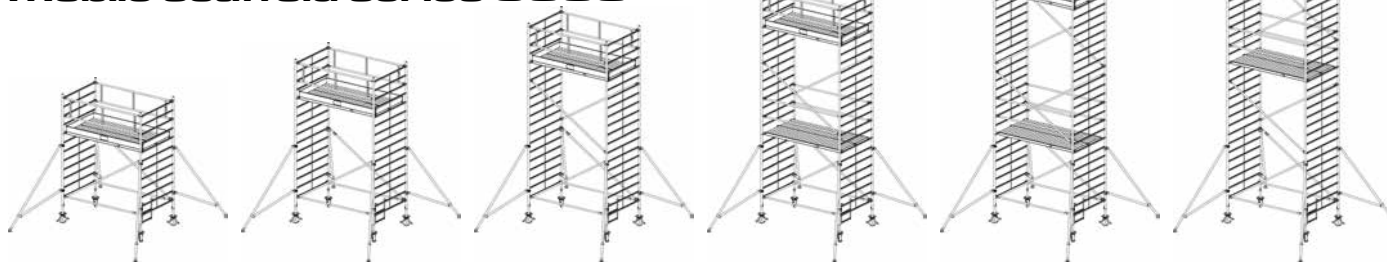

Working height: 4.30 m
Scaffold height: 3.30 m
Platform height: 2.30 m


Working height: 5.30 m
Scaffold height: 4.30 m
Platform height: 3.30 m

Working height: 6.30 m
Scaffold height: 5.30 m
Platform height: 4.30 m

Working height: 7.30 m
Scaffold height: 6.30 m
Platform height: 5.30 m

Working height: 8.30 m
Scaffold height: 7.30 m
Platform height: 6.30 m

Working height: 9.30 m
Scaffold height: 8.30 m
Platform height: 7.30 m

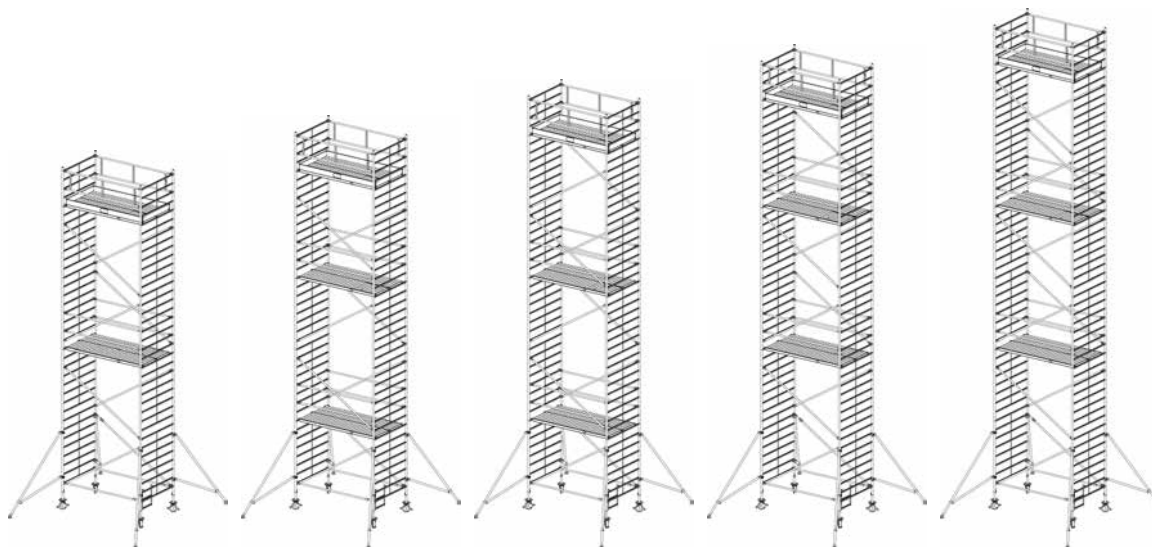

Working height: 10.30 m
Scaffold height: 9.30 m
Platform height: 8.30 m

Working height: 11.30 m
Scaffold height: 10.30 m
Platform height: 9.30 m

Working height: 12.30 m
Scaffold height: 11.30 m
Platform height: 10.30 m

Working height: 13.30 m
Scaffold height: 12.30 m
Platform height: 11.30 m

Working height: 14.30 m
Scaffold height: 13.30 m
Platform height: 12.30 m

Only for scaffolds with a field length of 2.50 m or 3.00 m

Working height m	Field length of scaffold	Field length of scaffold	Field length of scaffold	4.30 m	5.30 m	6.30 m	7.30 m	8.30 m	9.30 m	10.30 m	11.30 m	12.30 m	13.30 m	14.30 m
				2.30 m	3.30 m	4.30 m	5.30 m	6.30 m	7.30 m	8.30 m	9.30 m	10.30 m	11.30 m	12.30 m
Scaffold height m	3.30 m	4.30 m	5.30 m	6.30 m	7.30 m	8.30 m	9.30 m	10.30 m	11.30 m	12.30 m	13.30 m	14.30 m		
Parts list	Article No.	Article No.	Article No.	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity
Vertical frame 2 m	705181	705181	705181	2	3	4	5	6	7	8	9	10	11	12
Vertical frame 1 m	705198	705198	705198	2	2	2	2	2	2	2	2	2	2	2
Platform with hatch	701213	701220	701237	1	1	1	2	2	2	2	3	3	3	3
Platform without hatch	701251	701268	701275	1	1	1	2	2	2	2	3	3	3	3
Diagonal brace	702852	702845	702869	2	2	4	4	6	6	8	8	10	10	12
Rail brace	702210	702203	702241	2	2	2	6	6	6	6	10	10	10	10
Railing frame	702517	702500	702531	2	2	2	2	2	2	2	2	2	2	2
Climbing aid	703972	703972	703972	1	1	1	1	1	1	1	1	1	1	1
Outrigger	914095	914095	914095	4	4	4	4	4	4	4	4	4	4	4
Ballast holder	704146	-	-	0	0	0	0	4	4	4	4	4	-	-
Ballast holder	-	704146	-	0	0	0	0	0	0	4	4	4	4	4
Ballast holder	-	-	704146	0	0	0	0	0	0	0	0	0	0	0
Longitudinal board	703750	703750	703750	2	2	2	2	2	2	2	2	2	2	2
Transversal board	703712	703729	703736	2	2	2	2	2	2	2	2	2	2	2
Compensation sleeve	704160	704160	704160	4	4	4	4	4	4	4	4	4	4	4
Castor Ø 200 mm, height-adjustable	704108	704108	704108	4	4	4	4	4	4	4	4	4	4	4
Gravity pin	704405	704405	704405	4	6	8	10	12	14	16	18	20	22	24

Accessories

Article No.	Parts list	Weight (kg)
910059	Set of stabilisers, 1.2 m	6.9
910066	Set of stabilisers, 1.5 m	8.4
704306	Ballast weight	10.0
123718	TeleBoard 200	11.4