

Mobile scaffold series 500

- + TÜV-approved, suitable for a load of 200 kg/m² (scaffold class 3) in accordance with DIN EN 1004
- + The ideal scaffold for working heights up to 14.00 m
- + The platforms can be easily fitted between any of the diagonal braces and can be height-adjusted in 25 cm spacings without any changes to the scaffold itself
- + The 4.00 m² platform provides plenty of safe space for staff and material
- + The easy to handle vertical frames can easily be assembled by a single person and the profiled rungs ensure a safe ascendency of the scaffold
- + Scaffolds with a working height of 8.40 m and higher are supplied with outriggers
- + Field length: 2.00 m, 2.50 m or 3.00 m
- + Field width: 1.50 m



Depending on the configurations shown below additional ballast weights are required (sold separately as accessories). Please see the assembly instructions in the manual or on our website www.krause-systems.de for more information on the quantity of ballast weights needed. System components are shown on page 132 and following.



73500		Field length of scaffold 2.00 m – field width of scaffold 1.50 m											
	A up to approx.	in m	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40		
	B approx.	in m	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40		
	C approx.	in m	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40		
Weight		in kg	151.0	166.0	178.0	224.0	275.0	287.0	302.0	348.0	364.0		
Article No.			735058	735065	735072	735089	735096	735102	735119	735126	735133		
74500		Field length of scaffold 2.50 m – field width of scaffold 1.50 m											
	A up to approx.	in m	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
	B approx.	in m	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
	C approx.	in m	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40
Weight		in kg	165.0	183.0	195.0	249.0	303.0	315.0	333.0	387.0	405.0	417.0	435.0
Article No.			745057	745064	745071	745088	745095	745101	745118	745125	745132	745149	745156
75500		Field length of scaffold 3.00 m – field width of scaffold 1.50 m											
	A up to approx.	in m	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
	B approx.	in m	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
	C approx.	in m	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40
Weight		in kg	187.0	206.0	218.0	289.0	347.0	359.0	378.0	449.0	468.0	480.0	499.0
Article No.			755438	755537	755667	755766	755865	755964	755063	755162	755261	755360	755148

Mobile scaffold series 500



Working height: 4.40 m
Scaffold height: 3.40 m
Platform height: 2.40 m


Working height: 5.40 m
Scaffold height: 4.40 m
Platform height: 3.40 m

Working height: 6.40 m
Scaffold height: 5.40 m
Platform height: 4.40 m

Working height: 7.40 m
Scaffold height: 6.40 m
Platform height: 5.40 m

Working height: 8.40 m
Scaffold height: 7.40 m
Platform height: 6.40 m

Working height: 9.40 m
Scaffold height: 8.40 m
Platform height: 7.40 m

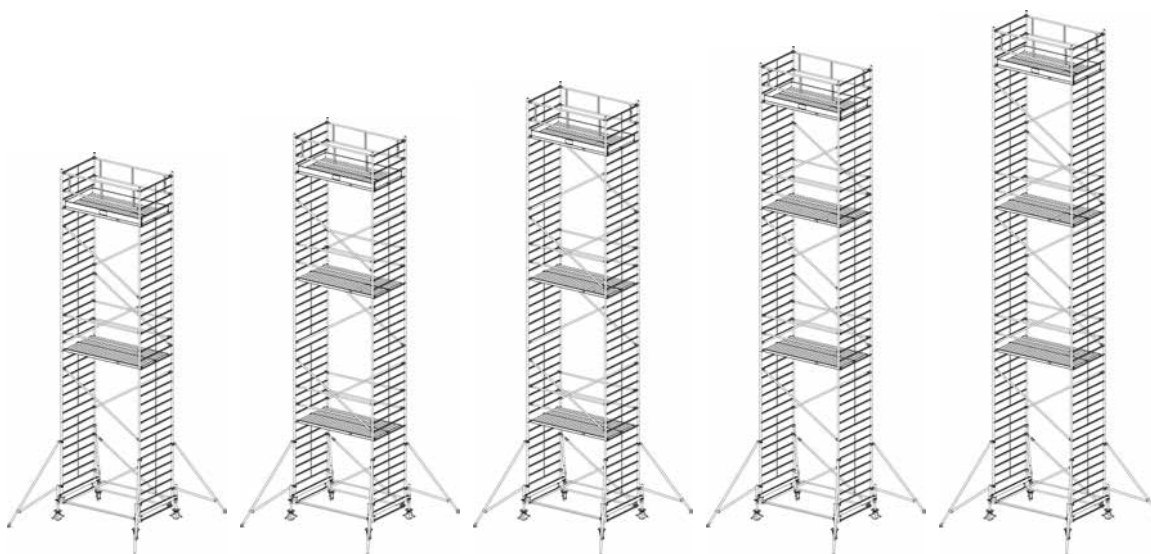

Working height: 10.40 m
Scaffold height: 9.40 m
Platform height: 8.40 m

Working height: 11.40 m
Scaffold height: 10.40 m
Platform height: 9.40 m

Working height: 12.40 m
Scaffold height: 11.40 m
Platform height: 10.40 m

Working height: 13.40 m
Scaffold height: 12.40 m
Platform height: 11.40 m

Working height: 14.40 m
Scaffold height: 13.40 m
Platform height: 12.40 m

Only for scaffolds with a field length of 2.50 or 3.00 m

Working height m	Field length of scaffold	Field length of scaffold	Field length of scaffold	4.40 m	5.40 m	6.40 m	7.40 m	8.40 m	9.40 m	10.40 m	11.40 m	12.40 m	13.40 m	14.40 m	
				2.40 m	3.40 m	4.40 m	5.40 m	6.40 m	7.40 m	8.40 m	9.40 m	10.40 m	11.40 m	12.40 m	13.40 m
Scaffold height m				3.40 m	4.40 m	5.40 m	6.40 m	7.40 m	8.40 m	9.40 m	10.40 m	11.40 m	12.40 m	13.40 m	14.40 m
Parts list	Article No.	Article No.	Article No.	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity
Vertical frame 2 m	705181	705181	705181	2	3	4	5	6	7	8	9	10	11	12	
Vertical frame 1 m	705198	705198	705198	2	2	2	2	2	2	2	2	2	2	2	
Platform with hatch	701213	701220	701237	1	1	1	2	2	2	2	3	3	3	3	
Platform without hatch	701251	701268	701275	1	1	1	2	2	2	2	3	3	3	3	
Diagonal brace	702852	702845	702869	2	4	4	4	6	6	8	8	10	10	12	
Rail brace	702210	702203	702241	0	0	0	4	6	6	6	10	10	10	10	
Railing frame	702517	702500	702531	2	2	2	2	2	2	2	2	2	2	2	
Base brace	704085	704078	704122	2	2	2	2	2	2	2	2	2	2	2	
Telescopic stabiliser	704214	704214	704214	2	2	2	2	2	2	2	2	2	2	2	
Outrigger	914095	914095	914095	0	0	0	0	4	4	4	4	4	4	4	
Longitudinal board	703750	703750	703750	2	2	2	2	2	2	2	2	2	2	2	
Transversal board	703712	703729	703736	2	2	2	2	2	2	2	2	2	2	2	
Castor Ø 200 mm, height-adjustable	704108	704108	704108	4	4	4	4	4	4	4	4	4	4	4	
Gravity pin	704405	704405	704405	8	10	12	14	16	18	20	22	24	26	28	

Accessories

Article No.	Parts list	Weight (kg)
910059	Set of stabilisers, 1.2 m	6.9
910066	Set of stabilisers, 1.5 m	8.4
704306	Ballast weight	10.0
704160	Compensation sleeve for vertical frame	3.0
703972	Climbing aid	10.0
123718	TeleBoard 200	11.4